SRY-Sincere, Responsible, Young
CE, RoHS, FCC, CB, ETL Certificated

Specification

	P2.6-5.2	P3.9-7.8	P7.8-7.8
Pixel Pitch	2.6-5.2mm	3.9-7.8mm	7.8-7.8mm
Density	73,964 dots/m²	32,873 dots/m²	16,436 dots/m²
Led Type	SMD1921	SMD1921	SMD3535
Panel Size	1000 x 500 mm	1000 x 500 mm	1000 x 500 mm
Panel Resolution	384 x 96 dots	356 x 64 dots	128 x 32 dots
Transparency	60%	75%	80%
Panel Material	Aluminum	Aluminum	Aluminum
Screen Weight	7.5KG	7.5KG	7.5KG
Drive Method	1/32 Scan	1/28 Scan	1/16 Scan
Best Viewing Distance	2.5-50m	4-80m	8-80m
Brightness	4000 nits	4000 nits	4500 nits
Refresh Rate	3840Hz	3840Hz	3840Hz
Input Voltage	AC110V/220V ±10%	AC110V/220V ±10%	AC110V/220V ±10%
Max Power Consumption	400W	400W	400W
Average Power Consumption	200W	200W	200W
Waterproof (for outdoor)	Front IP65, Rear IP54	Front IP65, Rear IP54	Front IP65, Rear IP54
Application	Indoor & Outdoor	Indoor & Outdoor	Indoor & Outdoor

SRYLED
Audio · Visual · Solutions

SHENZHEN SRYLED PHOTOELECTRIC CO., LTD.
Tel.:+86-755-84660806 Mobile/WhatsApp: +86-15013698328
Address: Building C, Huixin Industrial Park, Fuyong Town, Bao'an District, Shenzhen, China.

SRYLED
Audio · Visual · Solutions

SRYLED - Transparent LED Display

SRYLED Transparent LED display has the advantages of high transparency, high protection level, light weight, easy installation and maintenance etc. It can be used both indoor and outdoor, and can be quickly assembled and disassembled to meet the requirement of various stage scenes.

Jewery Store / Glass Building / Elevator
P2.6-5.2 / P3.9-7.8 / P7.8-7.8

SRYLED - Transparent LED Display

SRYLED Transparent LED display has the advantages of high transparency, high protection level, light weight, easy installation and maintenance etc. It can be used both indoor and outdoor, and can be quickly assembled and disassembled to meet the requirement of various stage scenes.

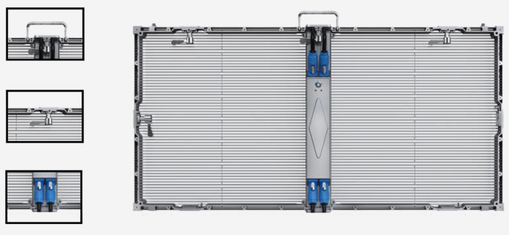

EASY ASSEMBLE

SRYLED Transparent LED display has the advantages of high transparency, high protection level, light weight, easy installation and maintenance etc. It can be used both indoor and outdoor, and can be quickly assembled and disassembled to meet the requirement of various stage scenes.

HIGH REFRESH RATE

Refresh rate is up to 3840Hz, stable performance.
It shows good quality image and videos for audience.

LIGHT WEIGHT

A 1000x500mm LED panel is only 7.5 KG/pc, it can be easily carried by one hand. Because of light weight, it will save much shipping cost.

HIGH TRANSPARENCY
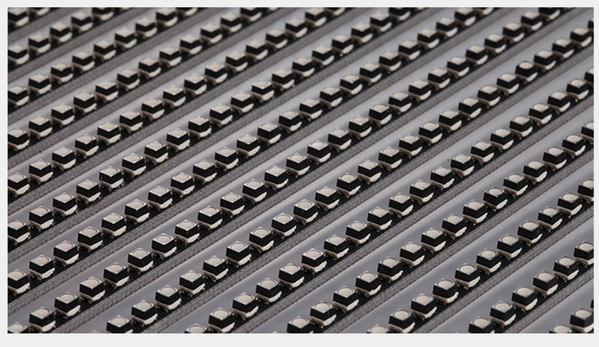
With over 70% high transparency, SRYLED transparent LED display is very suitable to install behinds window and showcase. Besides, it is an extra product for big building. Furthermore, it can also be used as common LED display if you don't need the transparency effect.